
Kontakt-Simon S.A.
43-500 Czechowice-Dziedzice, ul. Bestwińska 21
tel.: 32 32 46 300, faks: 32 32 46 331
e-mail: info@kontakt-simon.com.pl
www.kontakt-simon.com.pl

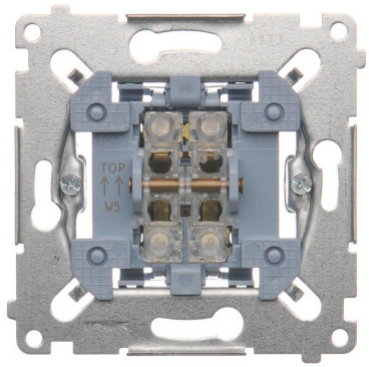

SW5M

Two gang switch, (Mechanism), 10AX, quick connection

Series	Simon 54, Simon 55
Product name / Type	Two gang switch
Product type	Mechanism
Nominal current	10 AX
Nominal voltage	250 V
Connection type / Crimp type	quick connection
IP degree of protection	IP20/IP44
Notes	To achive IP44 splash proof protection, use frame and button seal, To obtain IP44 splash proof use additional rocker seal TU1W, To obtain a product with a backlight, purchase an additional DUL (Simon 54) or DULB (Simon 55) backlight system - 1 pc
Backlight,	Optional, Orientated, Not included
Dedicated to	DKW5/.. double rocker - 9 colors, DKW5/AB11 double rocker - antibacterial white, DKW5L/.. double rocker for illuminated switches - 6 colors, DKW5L/AB11 double rocker for illuminated switches - antibacterial white

ETIM Class	EC001590 Switch
In print/Pictogram	none
Type of material	Metal
Surface protection	natural
Type of curface	not applicable
Mounting method[ETIM]	flush mounted
Fixing method	claws / screws
Height of product	75 mm
Width of product	75 mm
Depth of product	32 mm
Installation depth	26 mm
Operating method / Way of operating	rocker button
Connection layout	Switch 2x1 pole

Outer carton quantity	10
Measure unit	Qty.
Individual packaging EAN code	5902787847043
Pack. type	foil
Ind. pack. height	16 cm
Ind. pack. width	11 cm
Individual packaging lenght	3.7 cm
Weight of individual packaging with product	0.0546 kg
Outer type	cardboard box
Height of outer	10 cm
Outer width	19 cm
Outer lenght	23 cm